



Here now!

Mungo MQL Frame Plugs

Features



- Flanged Hex head with Torx drive T40 option
- Nylon plug has flanged collar to avoid contact corrosion
- Increased loading due to 4 expansion zones
- Setting depth of 70mm will result in higher loadings
- Made from high-quality polyamide PA6
- Through fixing

Applications

- Facade
- Roofing structures
- Timber construction to concrete

Suitable for:

- Solid concrete
- Brick & Perforated Brick
- Sandstone
- Natural stone , Rock

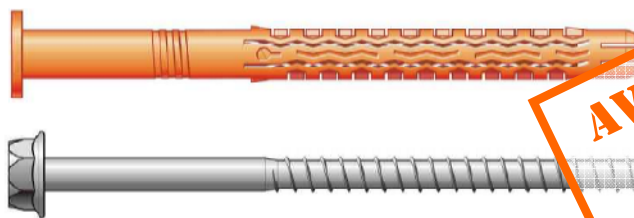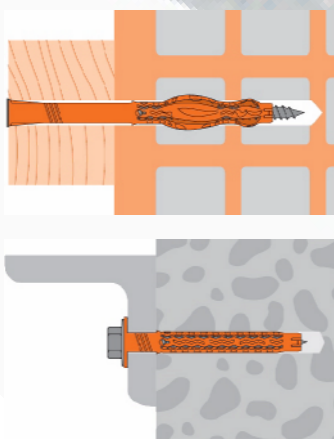

AVAILABLE NOW!


Knock-in Protection

Prevents premature expansion while installing




Quattro® Technology

Increased loading due to 4 expansion zones
Highest possible loadings in the range




Crumple Zone

Allows Adjustment on even surfaces



3-times rotation resistance

Stops Plug rotating in the drilled hole (especially for softer materials)



Universal Nylon Frame Plug with collar		Zinc finish				
Part No.	Description	mm	mm	qty	qty	
MQLKSTB10/80	MQLK-STB 10 X 80/10	10	10	50	450	
MQLKSTB10/100	MQLK-STB 10 X 100/30	10	30	50	300	
MQLKSTB10/120	MQLK-STB 10 X 120/50	10	50	50	300	

More information available at www.powers.com.au

New Release

Date: 22nd April 2010 Doc # : Mech NR0030

NEW